

Welcome

Thank you very much for purchasing DitoGear™ motion control equipment. We hope that the devices will meet your expectations bringing a great value to your productions.

We really strive for delivering the best unboxing and equipment usage experience. If we (or someone else) failed at some point, just let us know and we'll do our best to fix it promptly.



Here's where to get started.
» ditogear.com/welcome

More resources


Latest user manuals are available at
» ditogear.com/user-manuals

For advanced connection diagrams check
» ditogear.com/charts

In case you need further assistance contact us at
» ditogear.com/support

Prepare set of counterweights suitable for your camera setup before setting up the Jib. MiniJib Counterweights inner diameter is 30 mm.

1. Remove the Camera Adapter Plate of the OmniHead by removing the bolts as indicated.
2. Affix the Arm Clamp (A) to the OmniHead Tilt Shaft.
3. Affix the Jib Mount (B) to OmniHead body. Tighten the screw.
4. Mount the MiniJib Camera Adapter Plate (D) and tighten both bolts.
5. Place your camera on the MiniJib Camera Adapter Plate (D).
6. Put the Counterweight Shaft (F) on the end of the Arm (C) and put approximately suitable set of counterweights.
7. For fine balance adjustment loosen the bolts of the Arm Clamp (A) and fine tune the balance by moving the Arm (C) in the clamp. Lock the bolts at the end.
8. Mount the Tilt Adjustment Bar (E) and fix it in desired position.
9. You can adjust the initial tilt position by choosing one of the available mounting holes of the Tilt Adjustment Bar (E).
10. Use the knob on the end of the Tilt Adjustment Bar (E) for fine tuning of tilt axis.

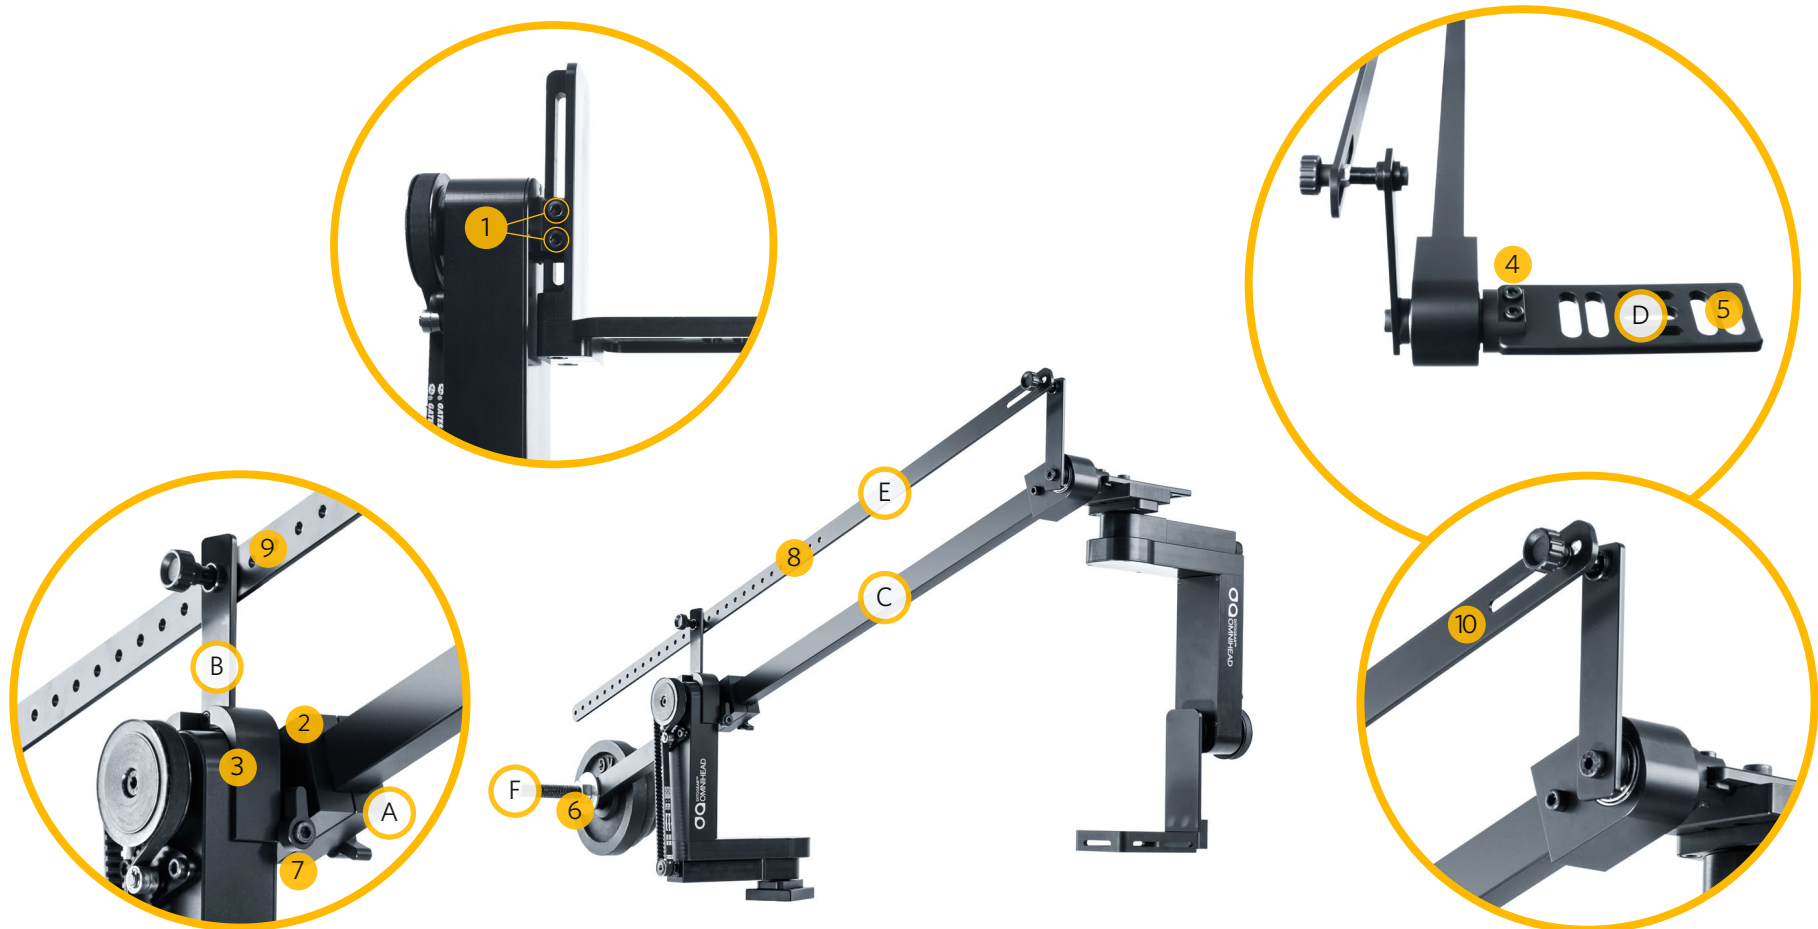

Prepare set of counterweights suitable for your camera setup before setting up the Jib. MiniJib Counterweights inner diameter is 30 mm.

1. Mount the Arm Clamp (B) to the Manual Operation Add-on (A) tilt shaft.
2. Mount the MiniJib Camera Adapter Plate (D) to the Arm and tighten both bolts.
3. Place your camera on the MiniJib Camera Adapter Plate (D).
4. Put the Counterweight Shaft (E) on the end of the Arm (C) and put approximately suitable set of counterweights.
5. For fine balance adjustment loosen the bolts of the Arm Clamp (B) and fine tune the balance by moving the arm in the clamp. Lock the bolts at the end.
6. Mount the Tilt Adjustment Bar (F) and fix it in desired position.
7. You can adjust the initial tilt position by choosing one of the available mounting holes of the Tilt Adjustment Bar (F).
8. Use the knob on the end of the Tilt Adjustment Bar (F) for fine tuning of tilt axis.



1. Signal cable

Connect an RJ45 type signal cable to the OmniHead and to the Output port of a DitoGear™ Breakout Box.

2. Controller

Connect an RJ45 type signal cable to OmniControllers or other controller of your choice and to Input ports of the Breakout Box.

3. Shutter release cable

Connect a shutter release cable to Sync 1 port (2.5mm micro jack) of the Breakout Box. Connect the other end to your camera.

This step is optional.

4. Power

Connect the power source - a DitoGear™ Power Pack 7Ah/14Ah, a DitoGear™ AC/DC power adapter or a 3rd party compatible power source to power port of Breakout Box

